

Project Name:	
Location:	i
Item #:	

PBC-850-TS-CAB-1DR, 2-Rack 850 lbs Blast Chiller

BLAST CHILLER SPECIFICATIONS

The standard modular blast chiller solution includes the panel walk-in, evaporators, and condensing unit. The high-capacity unit is well suited to a high-volume professional kitchen workflow, making it possible to improve your kitchen efficiency and food quality while staying within HACCP guidelines.

Standard features include a NEW advanced touch screen controller with USB port, holding cycle (once your cycle is completed the unit automatically switches over to a cooler), a single point product core probe, and up to 99 customized recipe programs.

EVAPORATOR OUTSIDE DIMENSIONS

(per evaporator coil) 28.8" W x 16.67" D x 72.08" H

OUTPUT CHILLING CAPACITY*

850 lbs within 90 minutes

OUTPUT THAWING CAPACITY*

0°F/38°F 170 lbs within 240 minutes 0°F/38°F 340 lbs within 480 minutes 0°F/38°F 510 lbs within 720 minutes

REFRIGERANT:

R448A

HEAT LOAD BTU/HR:

41,780/-10°F SST/+95°F ambient

ELECTRICAL SUPPLY:

1PH/208-240 V/60 Hz

20 A circuit, # 12 wire required

Note: * Performance ratings for this unit are based on exterior dimensions of 64.5° W x 87° D x 88° H. Your performance results may vary based on the interior dimensions of your unit and the characteristics of the food being processed. Contact your regional sales person for more information.



STANDARD FEATURES

- New advanced 7" Gorilla glass touch screen controller with USB port on easy-to-use control panel
- Holding cycle: automatically switches over to holding mode after each cycle is completed
- One single point product core probe registers product temperatures
- Meets the demands of HACCP guidelines for proper food chilling
- Automatic air defrost
- · Evaporator is enclosed in a frame and cabinet
- Programmable controller with up to 99 customized options
- · Electric thawing heaters

WARRANTY

- Two years warranty on parts and labor
- · Compressor warranty 3-5 years (parts only)


A COMPLETE SOLUTION

The package includes a PrepRite[™] walk-in, perfectly designed to fit your blast chiller needs. The walk-in is available with 1 or 2 doors, external ramp, 8" deep interior ramp designed to accommodate two roll-in racks at 32" x 32" x 74" each and features our exclusive anti-bacterial Sanisteel interior metal finish.

It also includes an air cooled, remote, outdoor condensing unit as standard. Other condensing unit options, including indoor and water-cooled models are available on request.

Notes: The installation of the blast chiller and the installation of the remote condensing unit must be performed by a qualified professional. All specifications are subject to change without notice.

PBC-850-TS-CAB-1DR, 2-Rack 850 lbs Blast Chiller

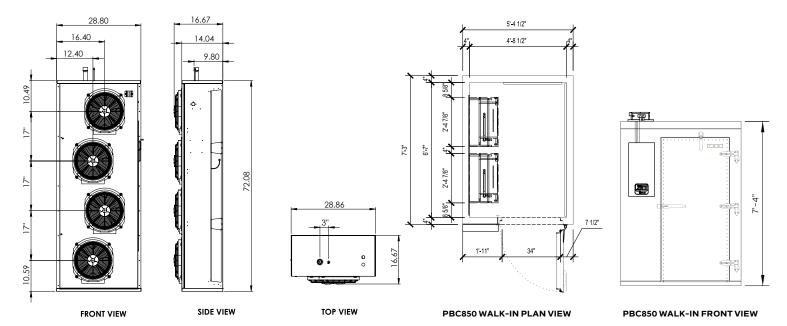


PBC850-TS includes two evaporator coils

EVAPORATOR MODEL			DIMENS	SIONS		PBC850 W
		OUTSIDE		SHIPP	PING	WIDTH
PBC850-TS 5979	WIDTH	DEPTH	HEIGHT	DIMENSIONS	WEIGHT	WIDTH
3373	28.8"	16.67"	72.08"	81" x 41" x 19.5"	400 lbs	64.5

PBC850 WALK-IN DIMENSIONS (ins)									
WIDTH	DEPTH	HEIGHT							
64.5	87	88							

MAXIMUM LOAD PER CYCLE		E	LECTRICAL DAT	REFRIGERATION DATA				
Chill	Volts	Hz	Phase	Amps	Circuit Amps	Refrigerant	Suction Line	Liquid Line
850 lbs	208-240	60	1	14.4	20	R448A	1.38	0.38

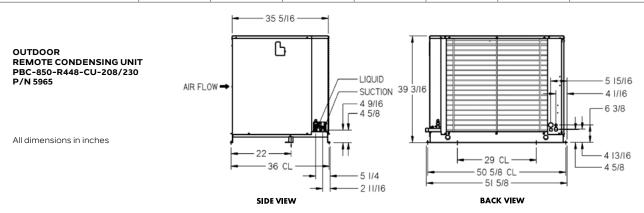

	ELECTRICAL DATA – SUPPLY 3 PH/208-240 V/60 Hz											
Co	Compressor(s)		Fan Motor(s)			Electric Ratings						
R	RLA LRA Qty. Hp FLA Defrost Type H 27.6 161 1 1/3 2.7 Air Defrost		Qty.	Нр	FLA	Defrost Type	High or Low Amps	Contactors	MCA	MOPD	Evap. Fan Amps	Defrost Heater Amps
2			High Amps	1	75	80	20	60				

ı						UNIT SP	ECIFICATIONS			
Ī	Refrigerant	Connections (ins)		Receiver 90% Full (lbs)		Fan Blade(s) Sound Data (c	Sound Data (dR)	Approx Not Weight (lbs)	Shinning Woight (lbs)	Shipping Dims. (ins)
1		Liquid Line	Suction	Standard	Oversized	Dia. (ins)	Souria Data (GB)	Approx. Net Weight (ibs)	Shipping Weight (ibs)	LXWxH ` ′
Γ	D448Δ	0.5	1 125	28	52	22	91	805	992	36 75 v 51 75 v 30 25

Notes: The installation of the blast chiller and the installation of the remote condensing unit must be performed by a qualified professional. All specifications are subject to change without notice





















Proud to be family-owned.